

Thank you for purchasing a Stereotech Linear 'Record' equipment rack. Stereotech is an Australian owned company proudly manufacturing a range of quality audio related furniture right here in Australia. We try hard to source raw materials and components that are also manufactured in Australia. For a complete list of country of origin sourcing please visit the website.

Assembly of your new rack is very simple. The accessory bag contains all you need for assembly including required tools excluding an adjustable spanner or alternatively a 13 mm open end spanner.

Please consult the diagram on the back page to aid with assembly.

Hard floors - Use the isolation spikes as per preferred hi-fi practice. When using the spikes on a hard floor, place the floor protectors under each spike to aid with floor care and to maximise performance.

Carpeted floors - The spikes will pierce the carpet for maximum stability and performance. The floor protectors are not used.

In either case above slight tweaking of heights of spikes will be required to make the rack perfectly level. Use your spanner for this (not supplied).

It should be noted that this rack is crafted from timber. The same quality materials that premium loudspeakers are manufactured from (MDF and Birch Plywood). This improves performance versus other materials due to minimal resonance while still being light, stiff and durable. Although like loudspeakers, the clear coated timber finish may darken with exposure to light and/or damp. Spills are to be avoided. Small inconsistencies in finish related to the nature of timber and plywood may occur. The appearance of every timber part will be very slightly different to the next. This is the nature of a non man made, natural material.

Warranty - All Stereotech products carry a 2 year manufacturers warranty covering all aspects of the product as per Australian law. A manufactures warranty warrants against defects that have occurred during manufacturing. The warranty does not cover misuse, damage, or incorrect assembly. Stereotech will not liable for any injury or damage caused by this product.

Thanks again for buying a Stereotech product. If you would like to leave us a 5 star Google review it would be greatly appreciated. If you have any questions/issues at all please contact your dealer or Stereotech.

Contents - You should have 2 packages. 1 contains 5 shelves, the other 6 upright pieces, 2 feet and a pack of accessories. All parts should be unpacked and unwrapped very carefully making sure not to damage the parts with the knife or whatever tool you use to snip the tape.

Accessory pack - Your accessory bag should contain the following -

- 4 x M6 countersunk screws
- 1 x Hex key to tighten above screws
- 1 x Long handle Philips screw driver
- 12 x Philips screws
- 8 x Spikes
- 8 x Spike washers
- 8 x Spike nuts
- 4 x Floor protectors

Assembly guide - Start with loosely screwing 4 Philips screws through an intermediate shelf (an intermediate shelf is one with the cable management cut away section on the rear edge) from above (using the 4 x M6 sized holes), into the 2 feet pieces. The front of the feet is the end where the M8 hole for the spike is very close to the M6 hole for the assembly Philips screw. Do not do the screws up tight, in fact leave approx 10 -1 2mm of exposed thread so an upright can slide under the screw heads and be screwed down tight with the long Philips screw driver.

The spikes can be fitted to the underneath of the feet before building the rest of the rack (onto the 'base') while it is still easy to manoeuvre.

This basic assembly method continues up to the top shelf where the M6 counter sunk screws are used through the top shelf to complete assembly. Remember to tighten all Philips screws as you add uprights and shelves as it is impossible to tighten them once the next layer of shelving is in place.

Please also not that the internal cutaways for cable management go to the inside of the rack ie. They face in not out. Half of the supplied upright sections are right and the other half left handed.


Feel free to ring or email with any questions regarding assembly of this rack.

Check our website - For a short video that may make assembly easier.


Thanks again - For purchasing a Stereotech HiFi rack and supporting Australian manufacturing.

# Assembly instructions for Stereotech 'Linear' HiFi rack.

View of upright from above



Side view of upright -  
having been slid on  
from behind using keyhole cut outs

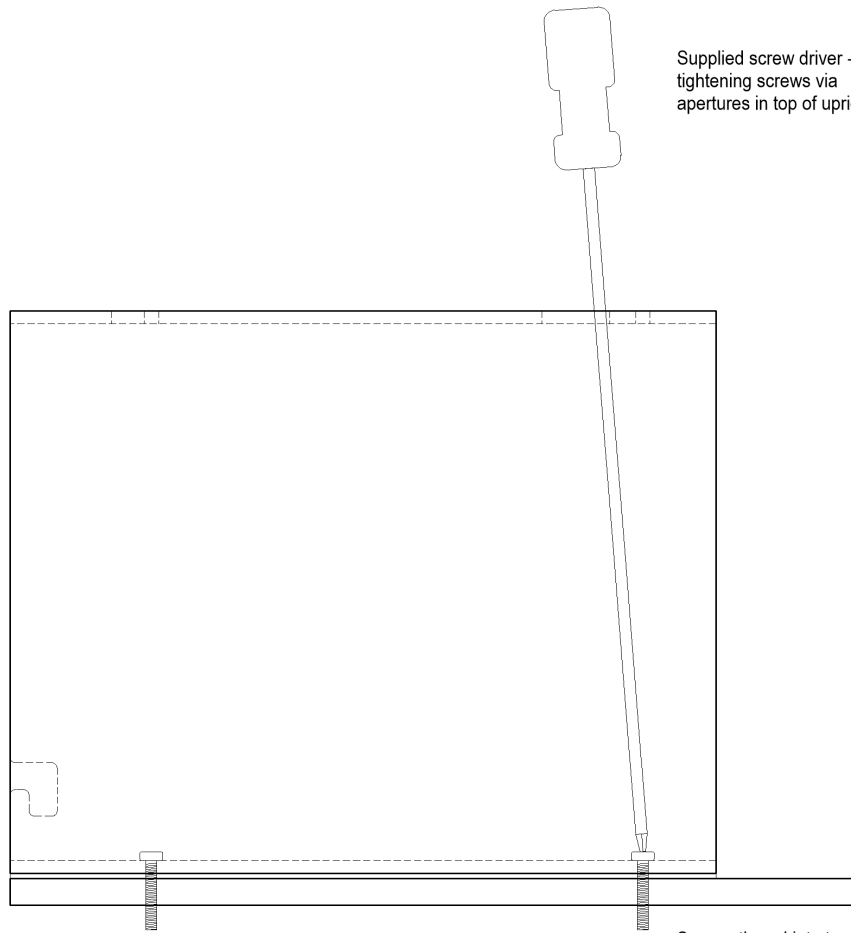

Supplied screw driver -  
tightening screws via  
apertures in top of upright

Screws thread into top of foot piece  
or another upright piece

View of upright from underneath

